



Smart Touch Switch Panel User Manual



Android App



iOS App

Installation Instructions :

1. Turn OFF the power supply before installation for safety.
2. Neutral wire connection is mandatory for proper operation.
3. Refer to the wiring diagrams provided in this manual and connect the wires accordingly.
4. Install the Touch Switch Panel onto the wall box. If it does not fit properly, verify that the correct size panel has been ordered for your box. Contact our support team if you need assistance.
5. Turn ON the power supply and follow the next section for App Configuration (for Wi-Fi-enabled switches).

App Configuration :

1. Download the SmartLife App on your smartphone and complete the one-time registration.
2. Make sure Mobile Bluetooth, Location, and your Wi-Fi connection are turned ON.
3. Ensure your Wi-Fi router is operating at 2.4 GHz.
4. Check whether the switch's Blue LED is blinking, indicating that the switch is in configuration mode.

5. If the LED is not blinking on the Smart Touch Panel, touch and hold the first switch (top left switch) for 15-20 seconds until the LED starts blinking.
6. Open the SmartLife App and tap the "+" button on the top right corner to add a device.
7. You can Auto Scan to detect the switch automatically, or to add manually:
 - Go to Electrical → scroll to Switch → select Switch (BLE + Wi-Fi).
8. The app will ask for your Wi-Fi ID and Password. Enter the details.

Please wait until the app completes the configuration.

The Blue LED will stop blinking within 20-180 seconds, after the linkage is successful.

You may rename the switchboard as desired and then tap "Done" to finish the setup.

You can now operate the smart switch through the SmartLife App.

Remote Configuration :

By default, your Touch Panel operates with the remote in common mode, where each remote button controls the switch corresponding to its switch number.

For example, L1 button is already linked with

1st switch, L2 with 2nd switch and so on.

If you want to CHANGE Switch Number Using the Remote

1. Ensure all physical switches are turned OFF.
2. On the touch panel, touch and hold the switch you want to reassign for 5 seconds.
3. The switch will start blinking.
4. Point the remote towards the touch switch panel.
5. Press the remote button which you want to assign to that switch.
6. The blinking will stop, and the switch is now paired with the selected remote button.

Set a Scene Using the Remote

1. Turn ON all switches you want included in the scene.
2. Touch and hold any one of these switches for 5 seconds until all selected switches start blinking.
3. Point the remote towards the touch switch panel.
4. Press the Scene button on the remote one time.
5. Blinking will stop, and the selected switches will now operate together using the scene button.

Voice Assistant Configuration :

Alexa Setup

1. Download and register in the Amazon Alexa App.
 2. Go to Skills & Games, search for "SmartLife", and link it.
 3. After linking, say: "Alexa, discover my devices."
 4. Alexa will display all discovered devices.
- If any device is missing, check your internet connection and repeat the process.


Google Home Setup

1. Download and register in the Google Home App.
2. Tap the "+" button → Link service → Works with Google.
3. Search for and select "SmartLife". Your devices will link automatically.
4. If any device is not detected, check your internet connection and repeat the setup steps.


For Support : ☎ +91 75748 48900

Website : 🌐 www.teqooz.com


2 Switch (1-2 way)

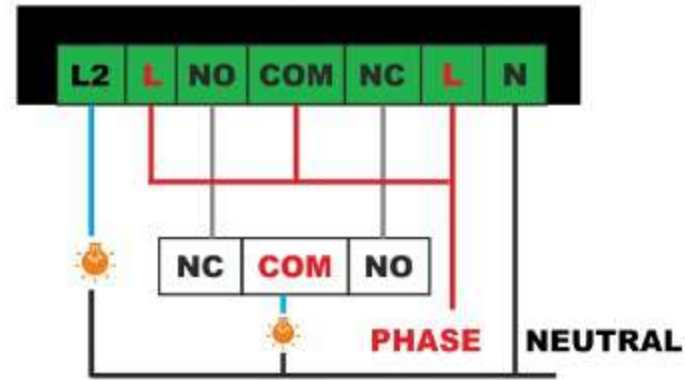


2 Switch (2-2 way)

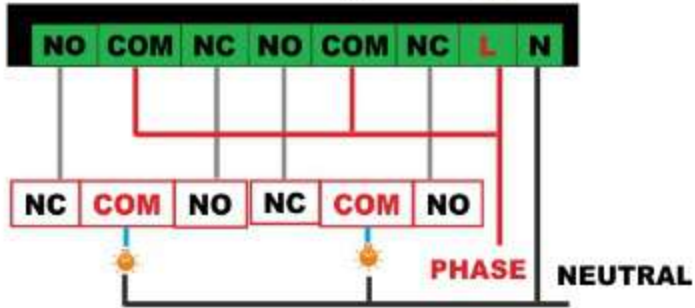


4 Switch

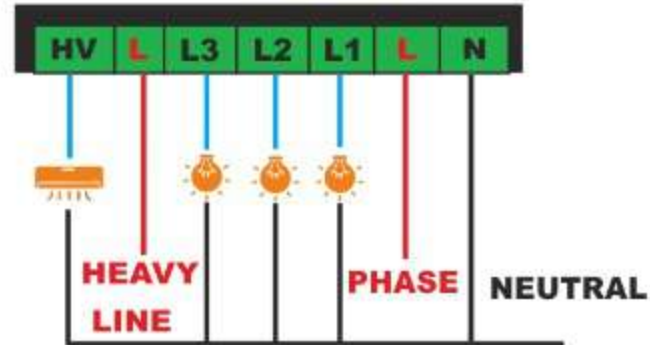


4 Switch & 1 Fan

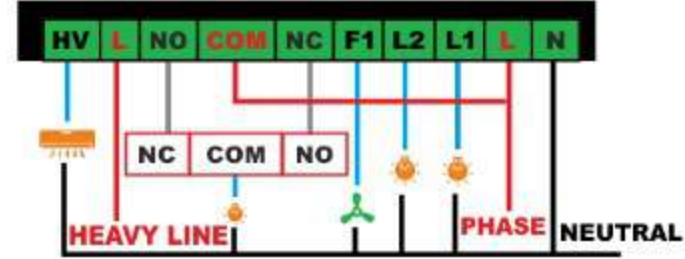


6 Switch & 1 Fan

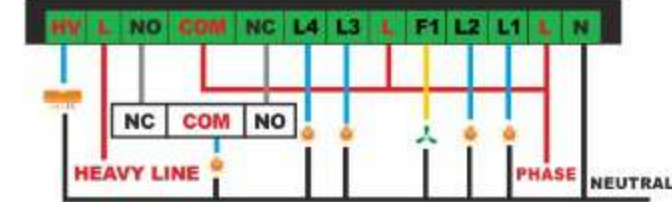


6 Switch

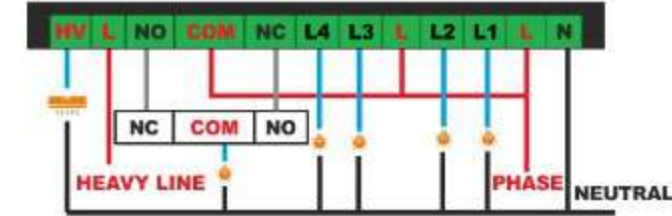


8 Switch & 1 Fan

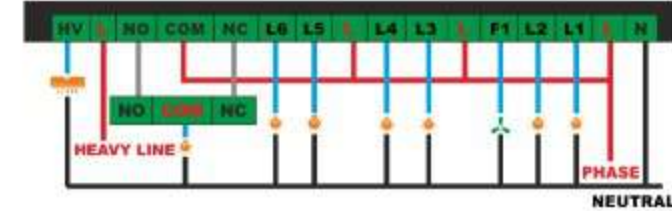

8 Switch

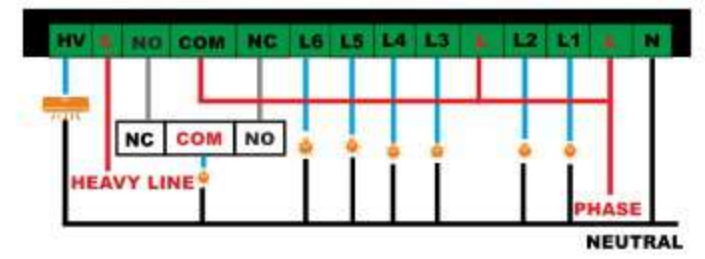

6 Switch & 2 Fan

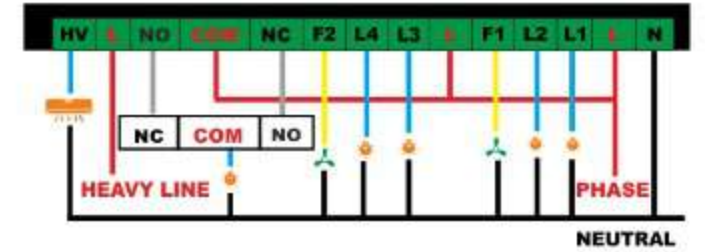

4 Switch & 2 Fan

